

FS4 & FS6 CROSS-TRAINER

ASSEMBLY INSTRUCTIONS



CORPORATE HEADQUARTERS

Columbia Centre III, 9525 West Bryn Mawr Avenue, Rosemont, Illinois 60018 • U.S.A.

847.288.3300 • FAX: 847.288.3703

Service phone number: 800.351.3737 (toll-free within U.S.A., Canada)

Global Website: www.lifefitness.com

INTERNATIONAL OFFICES

AMERICAS

North America Life Fitness, Inc.

Columbia Centre III
9525 West Bryn Mawr Avenue
Rosemont, IL 60018 U.S.A
Telephone: (847) 288 3300
Fax: (847) 288 3703
Service Email:
customersupport@lifefitness.com
Service Website: www.lifefitness.com/parts
Sales/Marketing Email:
consumerproducts@lifefitness.com
Operating Hours: 7:00 am-6:00 pm (CST)

Brazil Life Fitness Brasil

Av. Cidade Jardim, 900
Jd. Paulistano
São Paulo, SP 01454-000
BRAZIL
SAC: 0800 773 8282
Telephone: +55 (11) 3095 5200
Fax: +55 (11) 3095 5201
Service Email: suporte@lifefitness.com.br
Sales/Marketing Email:
lifefitness@lifefitness.com.br
Service Operating Hours:
9:00 - 17:00 (BRT) (Monday-Friday)
Store Operating Hours:
9:00 -20:00 (BRT) (Monday-Friday)
10:00 - 16:00 (BRT) (Saturday)

Latin America & Caribbean* Life Fitness Inc.

Columbia Centre III
9525 West Bryn Mawr Avenue
Rosemont, IL 60018 U.S.A
Telephone: (847) 288 3300
Fax: (847) 288 3703
Service Email:
customersupport@lifefitness.com
Sales/Marketing Email:
consumerproducts@lifefitness.com
Operating Hours: 7:00am-6:00pm (CST)

EUROPE, MIDDLE EAST, & AFRICA (EMEA)

Netherlands & Luxemburg Life Fitness Atlantic BV

Bijdorpplein 25-31
2992 LB Barendrecht
THE NETHERLANDS
Telephone: (+31) 180 646 666
Fax: (+31) 180 646 699
Service Email:
service.benelux@lifefitness.com
Sales/Marketing Email:
marketing.benelux@lifefitness.com
Operating Hours: 9.00h-17.00h (CET)

United Kingdom & Ireland Life Fitness UK LTD

Queen Adelaide
Ely, Cambs, CB7 4UB
Telephone: General Office (+44)
1353.666017
Customer Support (+44) 1353.665507
Fax: (+44) 1353.666018
Service Email: uk.support@lifefitness.com
Sales/Marketing Email: life@lifefitness.com
Operating Hours:
General Office: 9.00am - 5.00pm (GMT)
Customer Support: 8.30am - 5.00pm (GMT)

Germany & Switzerland Life Fitness Europe GMBH

Siemensstraße 3
85716 Unterschleißheim
GERMANY
Telephone: (+49) 89.31 77 51.0 (Germany)
(+41) 0848 000 901 (Switzerland)
Fax: (+49) 89.31 77 51.99 (Germany)
(+41) 043 818 07 20 (Switzerland)
Service Email:
kundendienst@lifefitness.com
Sales/Marketing Email:
kundenberatung@lifefitness.com
Operating Hours: 08.30 -16.30h (CET)

Austria Life Fitness Austria

Vertriebs G.m.b.H.
Dückerstraße 7-9/3/36
1220 Vienna
AUSTRIA
Telephone: (+43) 1.61.57.198
Fax: (+43) 1.61.57.198.20
Service Email: kundendienst@lifefitness.com
Marketing/Sales Email:
kundenberatung@lifefitness.com
Operating Hours: 08:30-16.30.h (MEZ)

Spain Life Fitness IBERIA

C/Frederic Mompou 5,1^a
08960 Sant Just Desvern Barcelona
SPAIN
Telephone: (+34) 93.672.4660
Fax: (+34) 93.672.4670
Service Email: servicio.tecnico@lifefitness.com
Sales/Marketing Email:
info.iberia@lifefitness.com
Operating Hours:
9.00h-18.00h (Monday-Thursday)
8.30h-15.00h (Friday)

Belgium Life Fitness Benelux NV

Parc Industriel de Petit-Rechain
4800 Verviers
BELGIUM
Telephone: (+32) 87 300 942
Fax: (+32) 87 300 943
Service Email:
service.benelux@lifefitness.com
Sales/Marketing Email:
marketing.benelux@lifefitness.com
Operating Hours: 9.00h -17.00h (CET)

All Other EMEA Countries & Distributor Business C-EMEA*

Bijdorpplein 25-31
2992 LB Barendrecht
THE NETHERLANDS
Telephone: (+31) 180 646 644
Fax: (+31) 180 646 699
Service Email:
service.db.cemea@lifefitness.com
Sales/Marketing Email:
marketing.db.cemea@lifefitness.com
Operating Hours: 9.00h-17.00h (CET)

ASIA PACIFIC (AP)

Japan Life Fitness Japan

Japan Nippon Brunswick Bldg., #8F
5-27-7 Sendagaya
Shibuya-Ku, Tokyo
Japan 151-0051
Telephone: (+81) 3.3359.4309
Fax: (+81) 3.3359.4307
Service Email: service@lifefitnessjapan.com
Sales/Marketing Email:
sales@lifefitnessjapan.com
Operating Hours: 9.00h-17.00h (JAPAN)

Hong Kong Life Fitness Asia Pacific LTD

32/F, Global Trade Square
21 Wong Chuk Hang Road
HONG KONG
Telephone: (+852) 2575.6262
Fax: (+852) 2575.6894
Service Email:
HongKongEnquiry@lifefitness.com
Sales/Marketing Email:
Marketing.HK.Asia@lifefitness.com
Operating Hours: 9.00h-17.00h
Service Operating Hours: 9.00h-18.00h

All Other Asia Pacific countries & distributor business Asia Pacific* Life Fitness Asia Pacific LTD

32/F, Global Trade Square
21 Wong Chuk Hang Road
HONG KONG
Telephone: (+852) 2575.6262
Fax: (+852) 2575.6894
Service Email:
HongKongEnquiry@lifefitness.com
Sales/Marketing Email:
Marketing.HK.Asia@lifefitness.com
Operating Hours: 9.00h-17.00h
Service Operating Hours: 9.00h-18.00h

**Operation Manuals and other Product Information available at
<https://www.lftechsupport.com/web/document-library/documents>**

عقودما ىلع ةحاتم زاوجلان ع ىرخأ تااوجل عمول ىغشنتلا ةلدا <https://www.lftechsupport.com/web/document-library/documents>

操作マニュアルおよびその他の製品情報については、<https://www.lftechsupport.com/web/document-library/documents> をご覧ください。

如需操作手册和其他产品信息，请登录：<https://www.lftechsupport.com/web/document-library/documents>

操作手冊和其他產品資訊請見 <https://www.lftechsupport.com/web/document-library/documents>

작동 설명서 및 기타 제품 정보는 <https://www.lftechsupport.com/web/document-library/documents> 에서 찾을 수 있습니다.

Trobareu el manual de funcionament i altra informació de producte a <https://www.lftechsupport.com/web/document-library/documents>

Mae Llwylyfrau Gweithredu a Gwybodaeth Arall am Beiriannau ar gael yn <https://www.lftechsupport.com/web/document-library/documents>

Die Betriebsanleitung und andere Produktinformationen erhalten Sie unter <https://www.lftechsupport.com/web/document-library/documents>

Encontrará el manual de funcionamiento y otra información de producto en <https://www.lftechsupport.com/web/document-library/documents>

Erabiltzailearen Eskuliburua eta Beste Produktuei buruzko Informazioa eskuratu <https://www.lftechsupport.com/web/document-library/documents> gunean

Käyttöoppaat ja muut tuotetiedot ovat saatavana osoitteessa <https://www.lftechsupport.com/web/document-library/documents>

Les manuels d'utilisation, ainsi que d'autres informations sur les Produits, sont disponibles sur <https://www.lftechsupport.com/web/document-library/documents>

Felhasználói kézikönyvek és más termékinformációk: <https://www.lftechsupport.com/web/document-library/documents>

Manuali di funzionamento e altre informazioni sui prodotti disponibili su <https://www.lftechsupport.com/web/document-library/documents>

Manuali di funzionamento e altre informazioni sui prodotti disponibili su <https://www.lftechsupport.com/web/document-library/documents>

Instrukcje obsługi i inne informacje o produktach dostępne na stronie <https://www.lftechsupport.com/web/document-library/documents>

Manuais de Operação e Informações sobre outros produtos disponíveis em <https://www.lftechsupport.com/web/document-library/documents>

Руководства по эксплуатации и другую касающуюся нашей продукции информацию можно найти, перейдя по ссылке <https://www.lftechsupport.com/web/document-library/documents>

Kullanım Kılavuzları ve Diğer Ürün Bilgileri <https://www.lftechsupport.com/web/document-library/documents>'da bulunmaktadır

Table of Contents

1 Important Safety Instructions	3
2 FS4 & FS6 Cross-Trainer Overview	8
3 Initial Setup	9
4 Service & Technical Data	11
5 Specifications	13
6 Assembly	14

1 IMPORTANT SAFETY INSTRUCTIONS

Read all instructions before using Life Fitness products.



CAUTION: Any changes or modifications to this equipment could void the product warranty.

- **DANGER:** To reduce the risk of electrical shock, always unplug Life Fitness products before cleaning or attempting any maintenance activity.
- **WARNING:** To reduce the risk of burns, fire, electric shock, or injury, it is imperative to connect each product to a properly grounded electrical outlet.
- **WARNING:** Heart rate monitoring systems may be inaccurate. Over exercising may result in serious injury or death. If you feel faint, stop exercising immediately.
- **WARNING:** The heart rate hand pulse sensors provide an approximate heart rate value. The sensors are not medical devices and should not be used in any type of medical application.
- **WARNING:** Ensure that there is at least 2 ft. (0.6 m) of clearance on all sides of the Life Fitness Cross-Trainer.
- **WARNING:** The Cross-Trainer is not equipped with a free-wheeling feature. Therefore, the product cannot be stopped immediately.
 - Never operate a Life Fitness product if it has a damaged power cord or electrical plug, or if it has been dropped, damaged, or even partially immersed in water. Contact Life Fitness Customer Support Services.
 - Position the product so that the power cord plug to the wall is accessible to the user. Make sure that the power cord is not knotted or twisted and that it is not trapped under any equipment or other objects.
 - If the electrical supply cord is damaged, it must be replaced by the manufacturer, an authorized service agent, or a similarly qualified person to avoid a hazard.
 - Always follow the console instructions for proper operation.
 - This unit is not intended for use by persons (including children) with reduced physical, sensory, or mental capabilities, or lack of experience or knowledge unless they have supervision or been given instruction concerning the use of the unit by a person responsible for their safety.
 - Do not use this product outdoors, near swimming pools or in areas of high humidity.
 - Use this product in a well-ventilated area.
 - Free standing equipment shall be installed on a stable and leveled base.
 - Make sure all components are fastened securely.
 - Never operate a Life Fitness product with the air openings blocked. Keep air openings free of lint, hair, or any other obstructing material.
 - Keep the power cord away from heated surfaces. Do not pull the equipment by the power cord or use the power cord as a handle.

IMPORTANT SAFETY INSTRUCTIONS

- Do not run the power cord on the floor under or along side of the cross-trainer.
- Never insert objects into any opening in these products. If an object should drop inside, turn off the power, unplug the power cord from the outlet, and carefully retrieve it. If the item cannot be reached, contact Life Fitness Customer Support Services.
- Never place liquids of any type directly on the unit, except in an accessory tray or holder. Containers with lids are recommended.
- Do not use these products in bare feet. Always wear shoes. Wear shoes with rubber or high-traction soles. Do not use shoes with heels, leather soles, cleats or spikes. Make sure no stones are embedded in the soles.
- Keep hands, feet, all loose clothing, shoelaces, and towels away from moving parts.
- Do not reach into, or underneath, the unit or tip it on its side during operation.
- Children should be supervised to ensure they do not play with the unit.
- Do not sit on side shrouds of the Cross-Trainer.
- Use the stationary platforms for standing only.
- The individual human power required to perform an exercise may be different than the mechanical power displayed on the Cross-Trainer.
- Use caution when mounting or dismounting the Cross-Trainer. Before mounting, use the moving arms to bring the pedal nearest to you to the lowest position. Use the stationary handlebars whenever additional stability is required. While exercising, hold onto the moving arms.
- Never face backward while using the Cross-Trainer.
- Do not allow other people to interfere in any way with the user or equipment during a workout.
- Allow LCD consoles to “normalize” with respect to temperature for one hour before plugging the unit in and using.
- Use these products for their intended use as described in this manual. Do not use attachments that have not been recommended by the manufacturer.
- Read all warnings on the product prior to starting a workout.
- If warnings are missing or damaged, please contact Life Fitness immediately for replacement warning labels. Warning labels are shipped with every product and should be installed before product is used. Life Fitness is not responsible for missing or damaged warning labels.
- Health and Environmental Regulations Warning - This product may contain chemicals known to the State of California to cause cancer, birth defects, or other reproductive harm. For more information related to the European Commission Regulation (EC) No. 1907/2006 (REACH) and the California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65), please visit <https://www.lftechsupport.com/web/guest/environmental-regulations-information>.

**SAVE THESE INSTRUCTIONS FOR
FUTURE REFERENCE.**

1 CONSIGNES DE SÉCURITÉ IMPORTANTES

Lire toutes les instructions avant d'utiliser les appareils Life Fitness.



MISE EN GARDE: Tout changement et toute modification de ce matériel peut annuler la garantie du produit.


- **DANGER:** Pour réduire les risques de décharge électrique, toujours débrancher cet appareil Life Fitness avant le nettoyage ou toute mesure d'entretien.
- **AVERTISSEMENT:** Pour réduire les risques de brûlures, d'incendies, de décharges électriques ou de blessures, chaque appareil doit absolument être branché sur une prise électrique correctement mise à la terre.
- **AVERTISSEMENT:** Des systèmes de surveillance de fréquence cardiaque peuvent être inexacts. Trop d'exercices peuvent entraîner des blessures sérieuses, voire mortelles. En cas de sensation d'évanouissement, arrêter immédiatement l'entraînement.
- **AVERTISSEMENT:** Les poignées capteurs de fréquence cardiaque calculent la valeur approximative de la fréquence cardiaque. Ces appareils ne sont pas destinés à un usage médical.
- **AVERTISSEMENT:** Ne placez pas votre cross-trainer près de murs, meubles ou autres équipements qui pourraient en obstruer l'accès. Prévoyez 0,6 m/2 pi de chaque côté du cross-trainer.
- **AVERTISSEMENT:** Le Cross-Trainer ne fonctionne pas « en roue libre » et ne peut donc pas être arrêté instantanément.
 - Ne jamais faire fonctionner un produit Life Fitness dont la fiche ou le cordon d'alimentation est endommagé, ni aucun appareil qui serait tombé ou aurait été endommagé ou même partiellement plongé dans l'eau. Appeler le service clientèle de Life Fitness.
 - Placer ce produit de manière à ce que l'utilisateur puisse accéder à la fiche du cordon d'alimentation. Assurez-vous que le cordon d'alimentation n'est pas noué ou tordu et qu'il n'est pas coincé sous un autre appareil ou sous tout autre objet.
 - Si le cordon d'alimentation électrique est endommagé, il doit être remplacé par le fabricant, par un réparateur agréé ou par une personne qualifiée afin d'éviter tout danger.
 - Les instructions de la console doivent toujours être suivies pour obtenir un fonctionnement correct.
 - Cet appareil n'est pas prévu pour être utilisé par des personnes (y compris les enfants) dont les capacités physiques, sensorielles ou mentales sont réduites, ou des personnes dénuées d'expérience ou de connaissance, sauf si elles ont pu bénéficier, par l'intermédiaire d'une personne responsable de leur sécurité, d'une surveillance ou d'instructions préalables concernant l'utilisation de l'appareil.
 - Ne pas utiliser ce produit à l'extérieur, près d'une piscine ou dans des endroits très humides.
 - Entraînez-vous dans une pièce bien ventilée.
 - L'équipement debout libre sera installé sur une écurie et une base nivelée.
 - Assurez-vous que tous les composants sont bien fixés.
 - Ne jamais faire fonctionner d'appareil LIFE FITNESS dont les orifices d'aération seraient bloqués. Les garder exempts de peluches, de cheveux ou de toute obstruction.

IMPORTANT SAFETY INSTRUCTIONS

- Conservez le cordon d'alimentation à l'écart des surfaces chaudes. Ne tirez pas l'appareil par son cordon et n'utilisez pas ce dernier comme poignée.
- Ne laissez pas traîner le cordon d'alimentation sur le sol, le long de la machine ou sous cette dernière.
- Ne jamais rien insérer dans les ouvertures de cet appareil. Si un objet tombe à l'intérieur de l'appareil, débrancher le cordon de la prise et le récupérer avec précaution. S'il est impossible de l'atteindre, communiquer avec le service à la clientèle de LIFE FITNESS.
- Ne placez jamais de liquides quelconques directement sur l'appareil, sauf sur le plateau à accessoires. Il est conseillé d'utiliser des conteneurs munis de couvercles.
- Ne pas utiliser cet appareil pieds nus. Toujours porter des chaussures. Porter des chaussures avec des semelles en caoutchouc ou fournissant une très bonne adhérence. Ne pas utiliser de chaussures à talons, à semelles en cuir ou munies de crampons. S'assurer qu'aucun caillou n'est incrusté dans les semelles.
- Éloignez les vêtements amples, les lacets de chaussure et les serviettes des pédales de l'elliptique. Gardez les mains et les pieds éloignés des parties mobiles.
- Ne pas placer les mains sous l'appareil ou dans l'appareil, et ne pas le renverser sur le côté pendant le fonctionnement.
- Ne laissez pas les enfants jouer avec l'appareil.
- Ne vous reposez pas sur les linceuls latéraux du Cross-Trainer.
- Évitez de vous asseoir sur les plates-formes stationnaires. Ne vous assoyez pas sur les plates-formes stationnaires.
- La puissance nécessaire à chaque utilisateur pour effectuer un exercice peut différer de la puissance mécanique affichée sur le Cross-Trainer.
- Montez et descendez avec précaution du Cross-Trainer. Avant de monter, placez la pédale située de votre côté en position basse, en vous aidant des bras mobiles. Utilisez les barres fixes lorsque vous avez besoin de renforcer votre équilibre. Pendant votre entraînement, tenez-vous aux bras mobiles.
- Ne jamais faire face à l'arrière lors de l'utilisation du Cross-Trainer.
- Ne laissez personne déranger de quelque manière que ce soit l'utilisateur ou interférer avec l'équipement durant un entraînement.
- Laisser les consoles ACL se « normaliser » pendant une heure quant à la température avant le branchement et l'utilisation de l'appareil.
- Cet appareil ne doit être employé que pour l'usage auquel il est destiné, conformément aux directives du manuel. Ne pas utiliser d'accessoires qui ne sont pas recommandés par le fabricant.
- Lisez tous les avertissements sur chaque produit avant de démarrer un exercice.
- Si les avertissements sont absents ou endommagés, veuillez contacter immédiatement Life Fitness afin de les faire remplacer. Les étiquettes d'avertissement sont livrées avec chaque produit et doivent être installées avant leur utilisation. Life Fitness ne peut être tenu responsable lorsque des étiquettes d'avertissement sont absentes ou endommagées.
- Réglementation en matière de santé et d'environnement : avertissement - Cet appareil contient des produits chimiques considérés par l'État de Californie comme étant cancérigènes et causant des malformations congénitales et d'autres troubles de l'appareil reproducteur. Pour plus d'informations sur la réglementation européenne (EC) No. 1907/2006 (REACH) et sur le California Safe Drinking Water and Toxic Enforcement Act de 1986 (Proposition 65), consultez la page <https://www.lftechsupport.com/web/guest/environmental-regulations-information>.

CONSERVER CES INSTRUCTIONS POUR TOUT USAGE ULTÉRIEUR.

2 FS4 & FS6 CROSS-TRAINER OVERVIEW

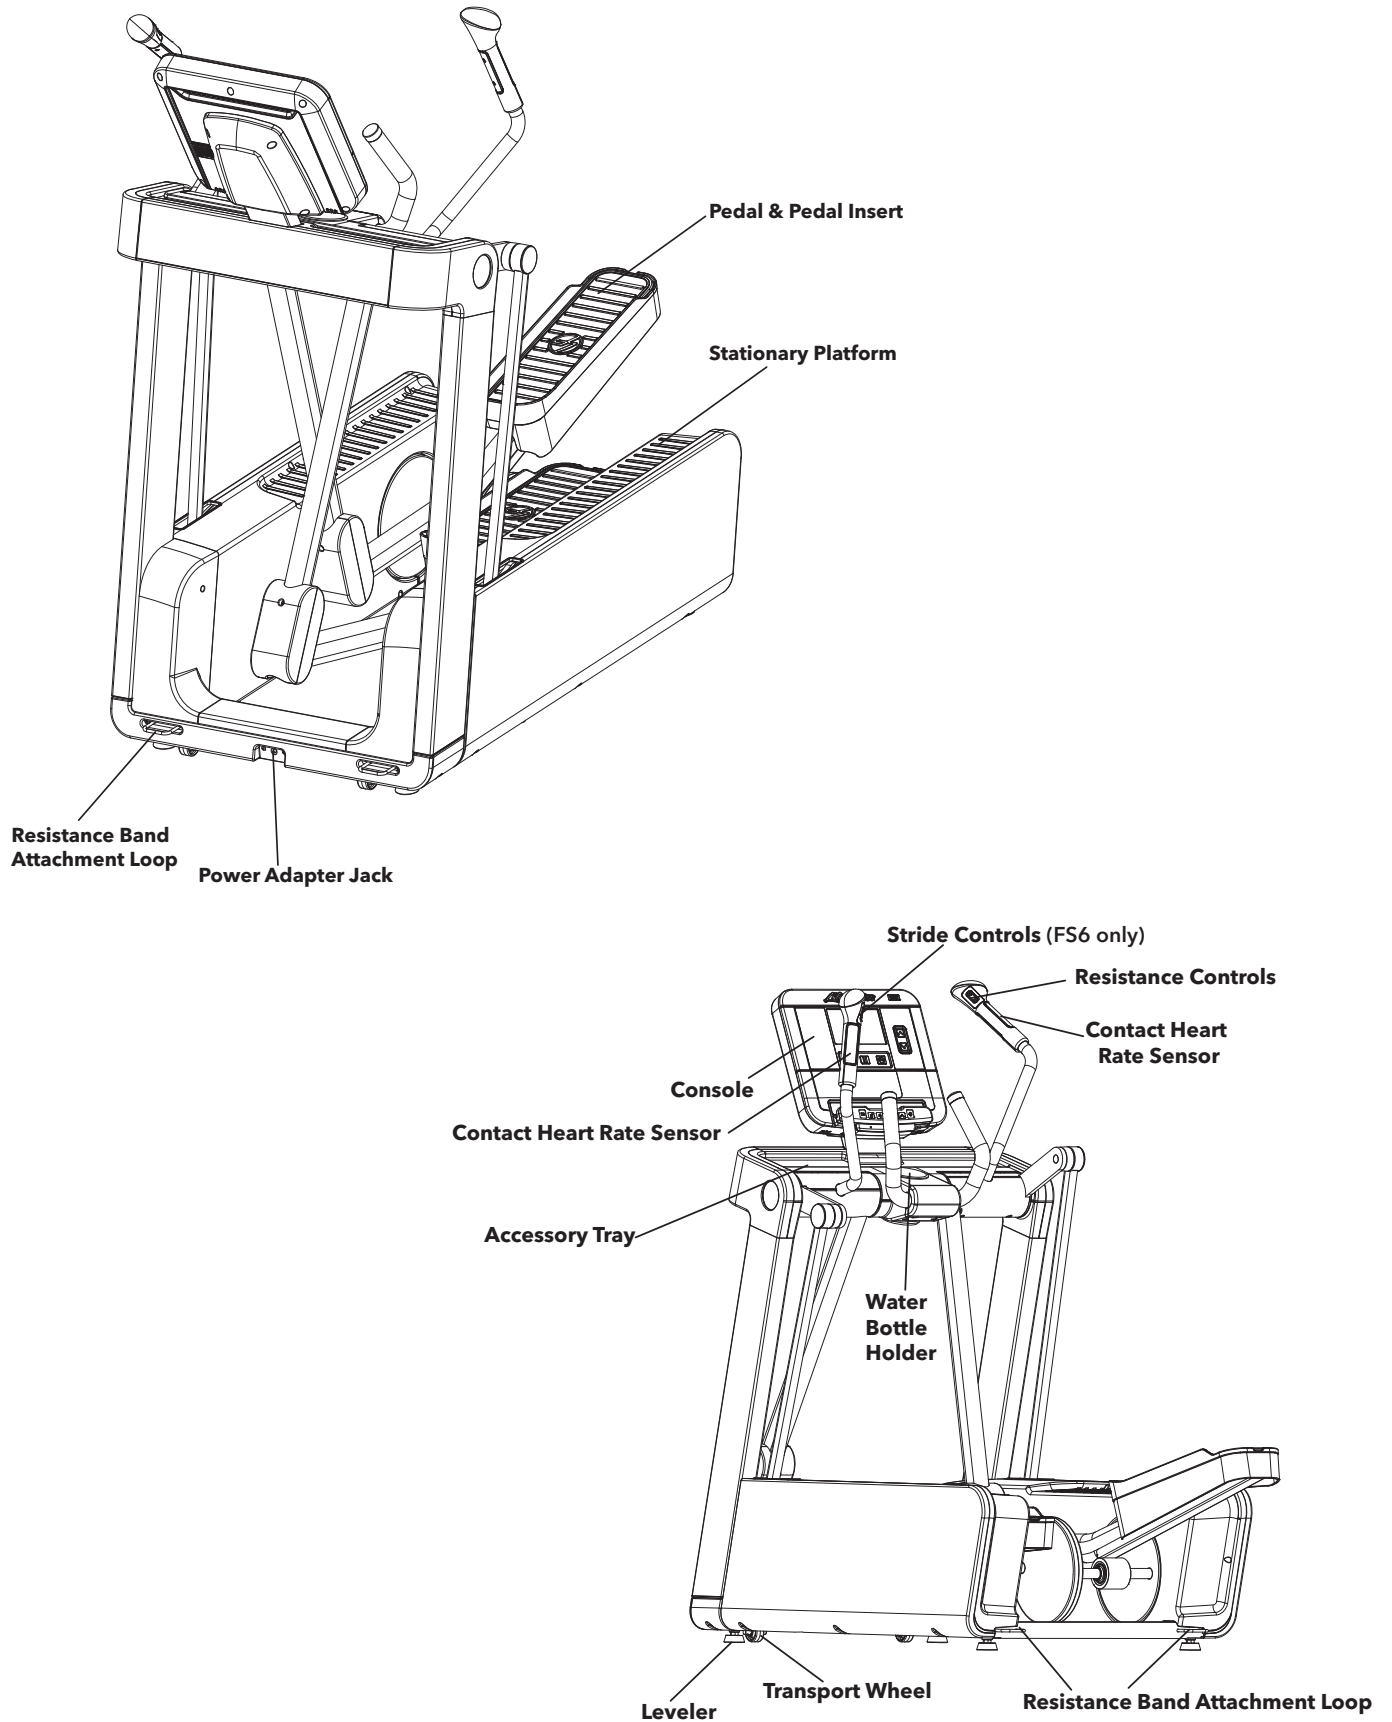


3 INITIAL SETUP

Read the entire User Manual before setting up the Total-Body Elliptical Cross-Trainer.

Note: This Total Body Elliptical Cross-Trainer is speed independent. Resistance can be adjusted by means other than speed.

Grounding Instructions

This product must be grounded. If it should malfunction or breakdown, grounding provides a path of least resistance for electric current to reduce the risk of electric shock. This product is equipped with a cord having an equipment-grounding conductor and a grounding plug. The plug must be plugged into an appropriate outlet that is properly installed and grounded in accordance with all local codes and ordinances.

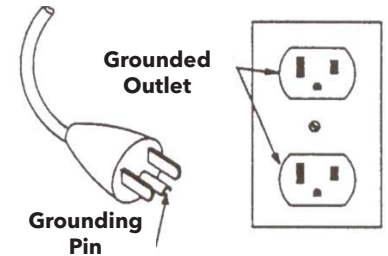

DANGER: Improper connection of the equipment-grounding conductor can result in a risk of electric shock. Check with a qualified electrician or service technician if you are in doubt as to whether the product is properly grounded. Do not modify the plug provided with the product. If it will not fit the outlet, have a proper outlet installed by a qualified electrician.

Electrical Power Requirements



Most Life Fitness Cross-Trainers are intended for use on a normal 120 volt circuit in the United States and Canada or a normal 230V circuit international. Below is a table that provides the current rating for this product based on supply voltage. Make sure that the original universal power supply is used before plugging into the outlet. Line voltage is noted on the product's serial label.

Supply Voltage (VAC)	Frequency (Hz)	Maximum Current (Amps)
100	50/60	2
120	50/60	1.6
230	50/60	0.8

Where to Place the Total-Body Elliptical Cross-Trainer

Note: Life Fitness recommends placing the unit on an equipment mat or carpeted floor.

After following all Safety Instructions move the Total-Body Elliptical Cross-Trainer to the place where it will be used. Allow a minimum clearance of 24 inches (61 cm) around the product. See *Specifications* for full dimensions if needed. The Total-Body Elliptical Cross-Trainer is equipped with front wheels so that it is simple to push or pull the Total-Body Elliptical Cross-Trainer to its final destination. To use the wheels make sure that the levelers are twisted up far enough so that all wheels (A) can engage with the floor. Once the Total-Body Elliptical Cross-Trainer is properly positioned, allow enough space in the front of the Total-Body Elliptical Cross-Trainer for the movement of the pedal levers. Also be sure to allow space on the side so that it is easy to mount the Total-Body Elliptical Cross-Trainer from the side.

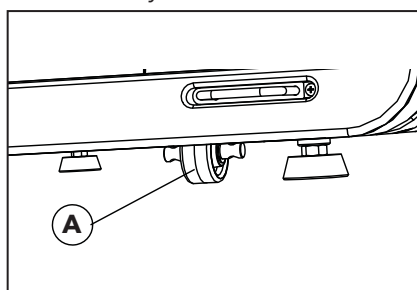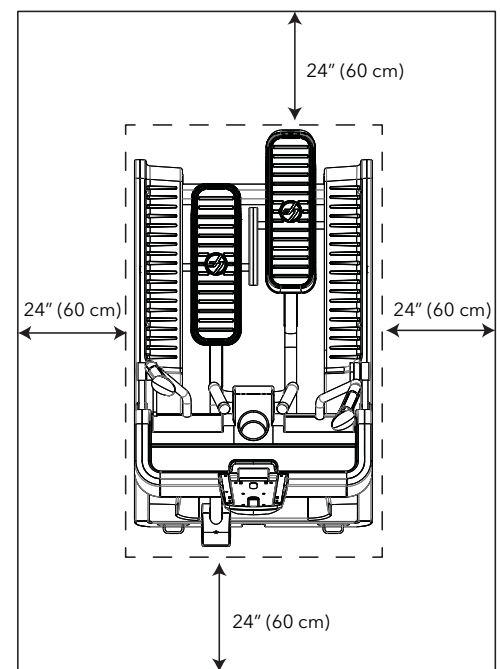

CAUTION: Make certain you have plenty of room for the swing of the moving arms. Test the Total-Body Elliptical Cross-Trainer at all stride lengths before finalizing its location.


CAUTION: Place Total-Body Elliptical Cross-Trainer in a dry place. Do not place in highly humid areas, like near swimming pools, as rust and corrosion may occur.

How to Stabilize the Total-Body Elliptical Cross-Trainer

Once the cross-trainer is positioned in the room lower the front levelers (B) to contact the floor. Both wheels should be 1/2" off the ground. The levelers will keep the cross-trainer fixed to the floor while using it.

CAUTION: Do not use the Total-Body Elliptical Cross-Trainer without the levelers touching the floor.


After placing the Total-Body Elliptical Cross-Trainer where it will be used, check the stability. If there is even a slight rocking motion, or the unit is not stable the front levelers will need to be adjusted. Determine which leveler is not resting firmly on the floor. To adjust the levelers downward twist the rubber portion of the leg counterclockwise. To adjust the levelers upward twist the rubber portion of the leg clockwise. After adjusting the levelers, tighten the jam nuts (C) against the stabilizer to lock the levelers in place.

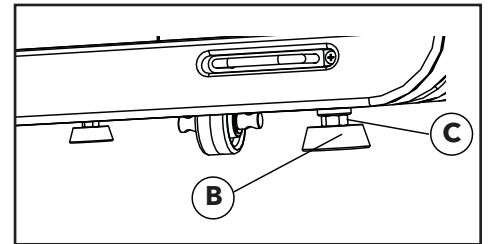

Note: After the Cross-Trainer is stable, be sure to tighten the nut on the leveler against the stabilizer tube. If this is not tightened, noise will occur.

Powering Up the Total-Body Elliptical Cross-Trainer

Your Life Fitness Total-Body Elliptical Cross-Trainer may come with either a U.S. line cord or one of several international line cords. **Insert and screw in** the appropriate power adapter jack into the connector on the front of the Total-Body Elliptical Cross-Trainer and tighten locking nut to ensure good connection. Then insert the plug into the wall outlet. Make sure the cord is placed so it doesn't bind and will not be walked on. Once the unit is turned on, the cross-trainer's stride length will auto-calibrate (*FS6 only*). Wait 30 seconds to allow for the calibration to complete. Then check that the LCD display lights up. If not, recheck the plug and wall connections. Make sure the wall outlet has power.

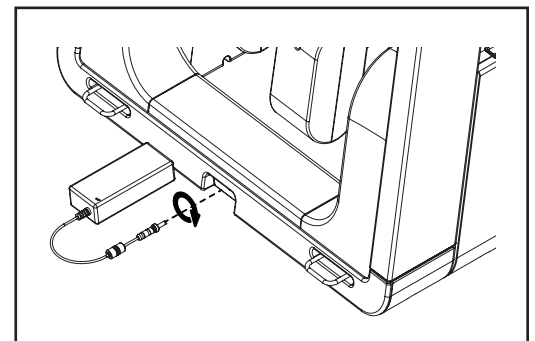

Mounting the Machine

When mounting the machine it is recommended that the pedal closest to you is in its lowest position. This can be done by pushing the arms to rotate the pedal until it is centered to the side of you at its lowest position. It is also recommended that the stride length on FS6 units be set to 18 in. (46 cm). The pedal is in its lowest position at 18 in. (46 cm) on an FS6 unit. If you are standing to the left side of the machine, when facing the console, place your left foot on the pedal closest to you and then swing your right leg over the right pedal. Use the stationary handlebar to stabilize yourself.

Dismounting the Machine

Bring the machine to a stop. It is recommended to put the pedal in its lowest position on the side of the unit you will be dismounting. If dismounting the machine on the left side, when facing the console, step off with the right leg first followed by the left leg. Use the stationary handlebar for stabilization.

Stride Length for Different Users (FS6 only)

The FS6 has nine different stride lengths from 18 - 26 in. (46 - 66 cm). Users may utilize any of the stride lengths. Research has shown that shorter users may prefer a shorter stride length while taller users may prefer a longer stride length.

4 SERVICE & TECHNICAL DATA

4.1 Preventive Maintenance Tips

The Life Fitness Total Body Elliptical Cross-Trainer is backed by the engineering excellence and reliability of Life Fitness and is one of the most rugged and trouble-free pieces of exercise equipment on the market today.

Note: *Safety of the equipment can be maintained only if the equipment is examined regularly for damage or wear. Keep the equipment out of use until the defective parts are required or replaced. Pay special attention to parts that are subject to wear, as outlined below.*

The following preventive maintenance tips will keep the Life Fitness Total Body Elliptical Cross-Trainer operating at Peak performance:

Important: Turn the cross-trainer off and unplug prior to performing any maintenance	
Weekly	Inspect the power cord. If the cord is damaged call technical support. Make sure the cord is positioned in a location where it will not be damaged.
Monthly	Clean the top surface of the pedals
	Clean the display console and all exterior surfaces with mild soap, water and a soft cotton cloth or a Life Fitness approved cleaner. Note: Do not use paper towels, ammonia or acid based cleaners on the product. At no time should cleaner be applied directly to any part of the equipment; spray the cleaner on a soft cloth and then wipe the unit.
	Inspect the exterior parts for wear and check that user assembly bolts are still tight.

Note: *Long fingernails may damage or scratch the surface of the console. Use the pad of the finger to press the keys.*

LIFE FITNESS Approved Cleaners (United States Availability Only)

Two preferred cleaners have been approved by Life Fitness reliability experts: PureGreen 24 and Gym Wipes. Both cleaners will safely and effectively remove dirt, grime and sweat from equipment. PureGreen 24 and the Antibacterial Force formula of Gym Wipes are both disinfectants that are effective against MRSA and H1N1.

PureGreen 24 is available in a convenient spray. Apply the spray to a microfiber cloth and wipe down the equipment. Use PureGreen 24 on the equipment for at least 2 minutes for general disinfection purposes and at least 10 minutes for fungus and viral control.

Gym Wipes are large, durable pre-moistened wipes to use on the equipment before and after workouts. Use Gym Wipes on the equipment for at least 2 minutes for general disinfection purposes.

Contact Life Fitness Customer Support Services to order these cleaners.
Call 1-800-351-3737 or email: customersupport@lifefitness.com.

LIFE FITNESS Compatible Cleaners

Mild soap and water or a mild non-abrasive household cleaner can also be used to clean the display and all exterior surfaces. Use a soft microfiber cloth only. Apply the cleaner to the microfiber cloth before cleaning. **DO NOT** use ammonia or acid based cleaners. **DO NOT** use abrasive cleaners. **DO NOT** use paper towels. **DO NOT** apply cleaners directly to the equipment surfaces.

4.2 Preventive Maintenance Schedule

Item	Weekly	Monthly	Biannually
Console Overlay	Clean		Inspect
Bottle Holder	Clean	Inspect	
Console Mounting Bolts			Inspect
Frame	Clean		Inspect
Plastic Covers	Clean	Inspect	
Side Panels	Clean	Inspect	
Lifepulse Sensors	Clean / Inspect		
Pedals and Straps	Clean	Inspect	

4.3 How to Obtain Product Service


1. Please contact your dealer or Life Fitness Customer Service at 1-800-351-3737.
2. Verify the symptom and review the operating instructions and troubleshooting matrix.
3. Locate and document the serial number of the unit. The serial number plate is located on the rear stabilizer. Please also have proof of purchase information available.

5 SPECIFICATIONS


Designed Use	Home
Max User Weight	400 lbs. / 181 kg
Resistance System	Eddy Current
Stride Length	FS4 22 in. (56 cm) (<i>Fixed Stride</i>)
	FS6 18 - 26 in. (46 - 66 cm) (<i>Adjustable Stride</i>)
Contact Heart Rate	On moving handles
Accessories	1 water bottle holder & 1 accessory tray
Power Supply	100 Volt (Japan), 120 Volt (U.S.), 220 Volt (Europe), 240+ Volt (Australia)

Assembled Dimensions		FS4 / FS6 Base
Length		52.81 in. (134.14 cm)
Width		31.87 in. (80.95 cm)
Height		64.78 in. (164.54 cm)
Weight		FS4 351 lbs. (159 kg)
		FS6 362 lbs. (164 kg)
Shipped Dimensions		FS4 / FS6 Base
Length		53 in. (134.62 cm)
Width		36 in. (91.44 cm)
Height		34 in. (86.36 cm)
Weight		FS4 417 lbs. (189kg)
		FS6 428 lbs. (194kg)


6 ASSEMBLY




M10 X 20MM HEX HEAD BOLT

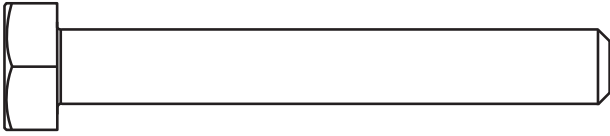

M10 X 75MM HEX HEAD BOLT




FLAT WASHER 8MM ID




M4 X 12MM PHILLIPS PAN HEAD SCREW




M5 X 8MM PAN HEAD SCREW



M8 X 16MM BUTTON HEAD CAP SCREW



M5 X 14MM PAN HEAD SCREW




M10 HEX NUT


Tools Required:

- Phillips Head Screwdriver
- 5mm Allen Wrench with extension
- 17mm Socket Wrench with extension
- 17mm Open End Wrench


Base assembly out of the box.

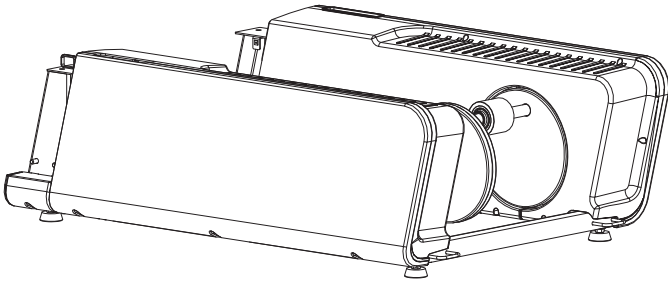

1. Remove left and right outer shrouds.
SAVE HARDWARE!

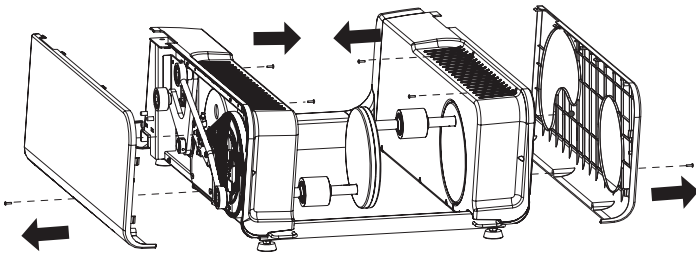


2. Secure the bridge assembly to the base assembly.

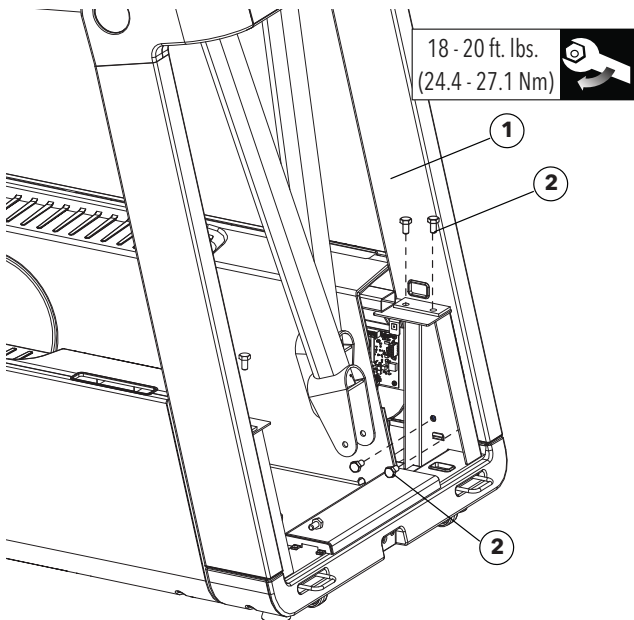


	Description	Qty.
1	Bridge Assembly	1
2	M10 X 20MM Hex Bolt	8
<i>17mm Socket Wrench with Extension</i>		

3. Install vertical uprights.


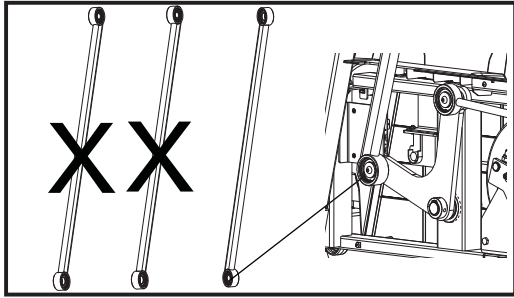


	Description	Qty.
1	Vertical Upright	2
2	M8 X 16MM Hex Button Head Cap Screw	4
3	Flat Washer 8MM ID	4
4	End Cap	2
5	Grommet	2
<i>5mm Allen Wrench</i>		

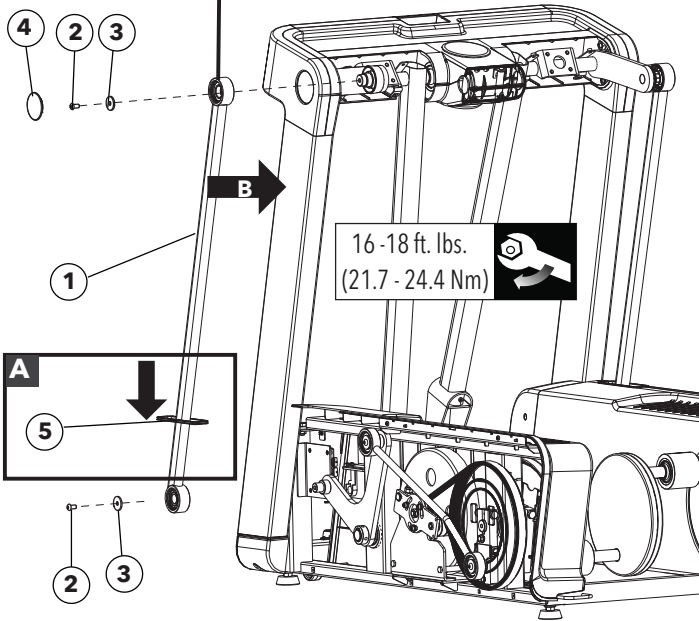


4. Install handlebars.

	Description	Qty.
1	Right Handlebar	1
2	Left Handlebar	1
3	M8 X 16MM Button Head Cap Screw	8
<i>5mm Allen Wrench</i>		

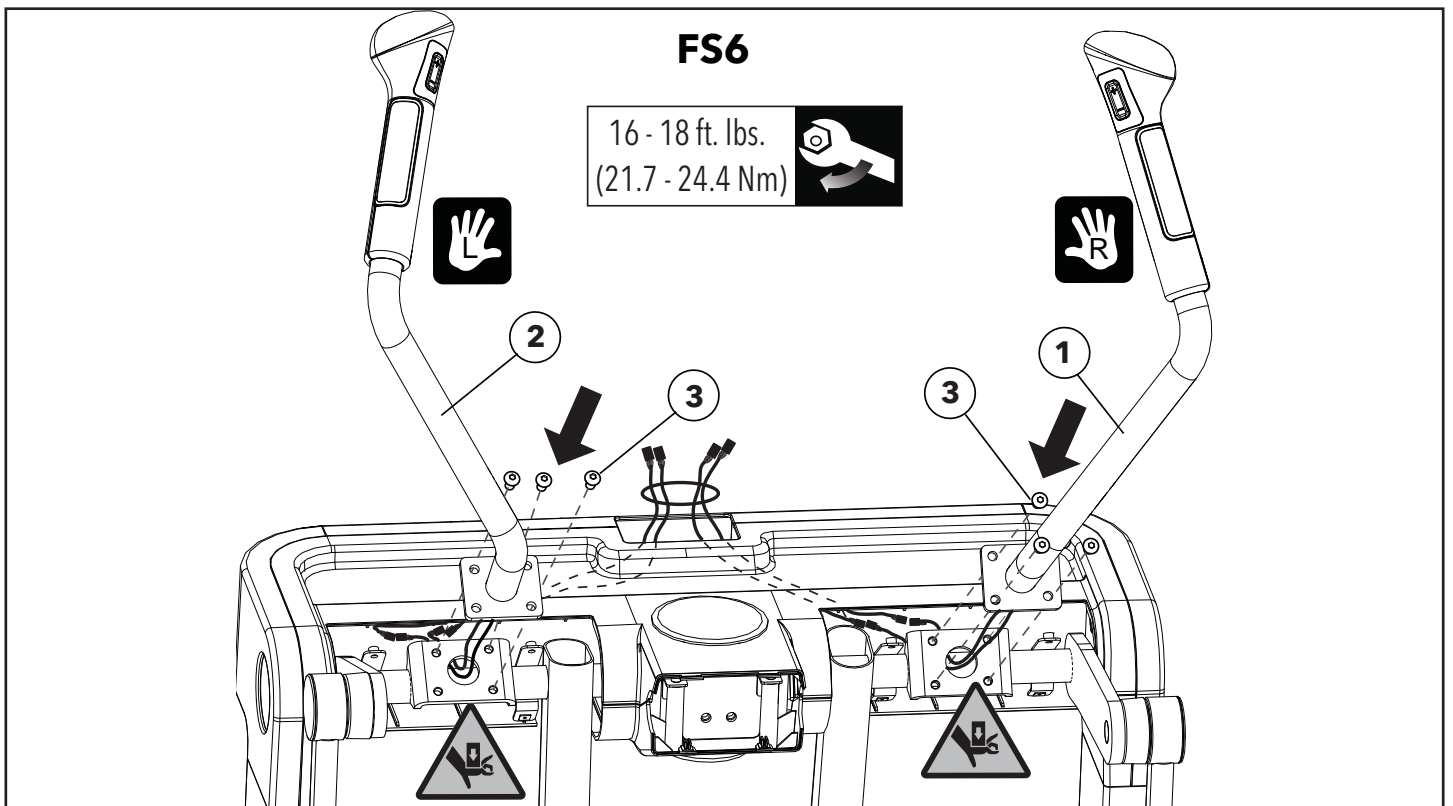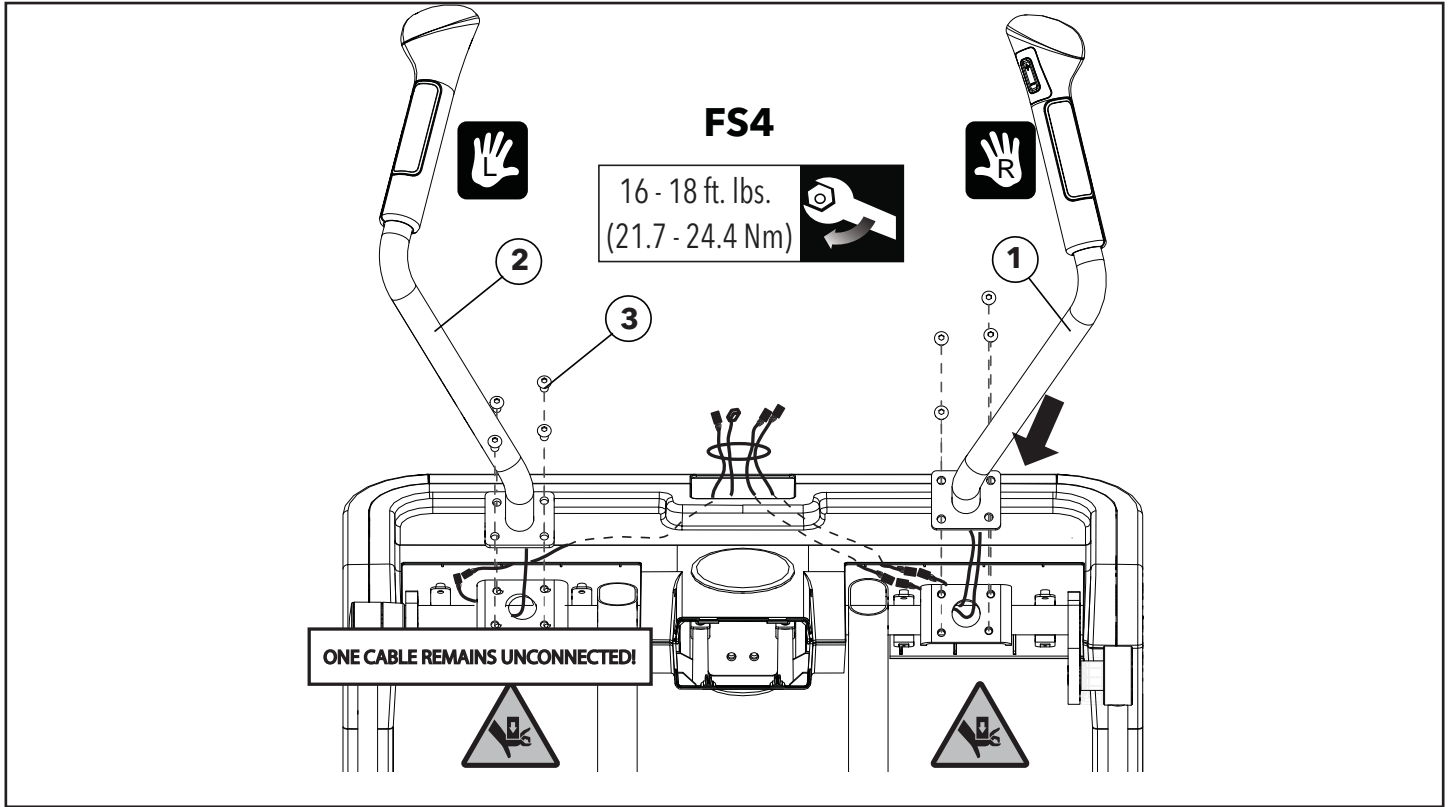


5. Install bullhorn.

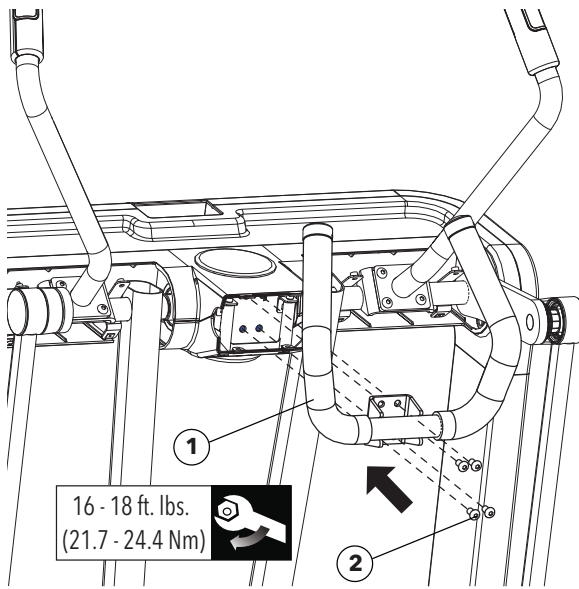


	Description	Qty.
1	Bullhorn	1
2	M8 X 16MM Button Head Cap Screw	4
<i>Use 5mm Allen Wrench with extension</i>		

6. Install console mounting bracket.

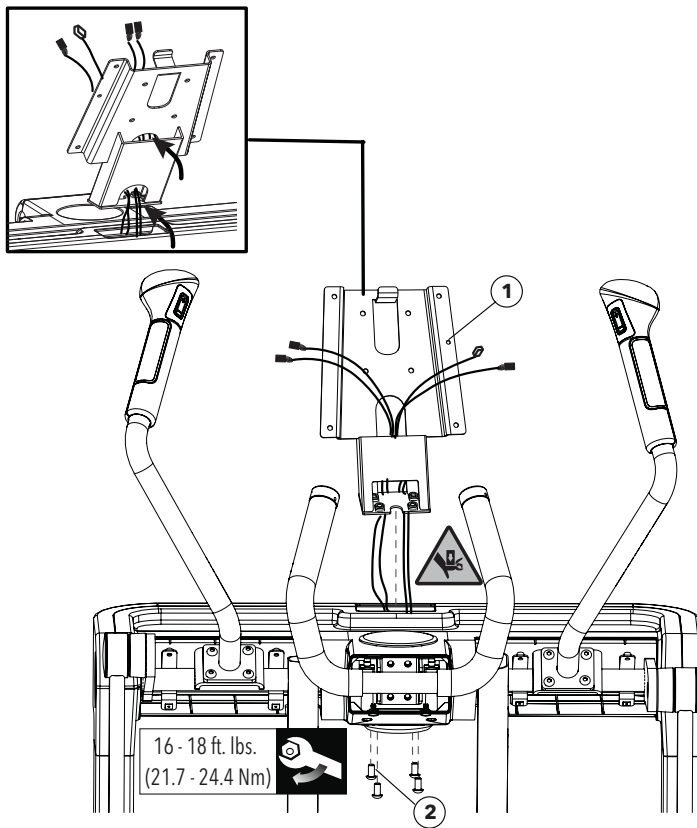


	Description	Qty.
1	Console Mounting Bracket	1
2	M8 X 16MM Button Head Cap Screw	4
<i>5mm Allen Wrench with extension or 5mm T-handle</i>		

7. Attach bullhorn cover.

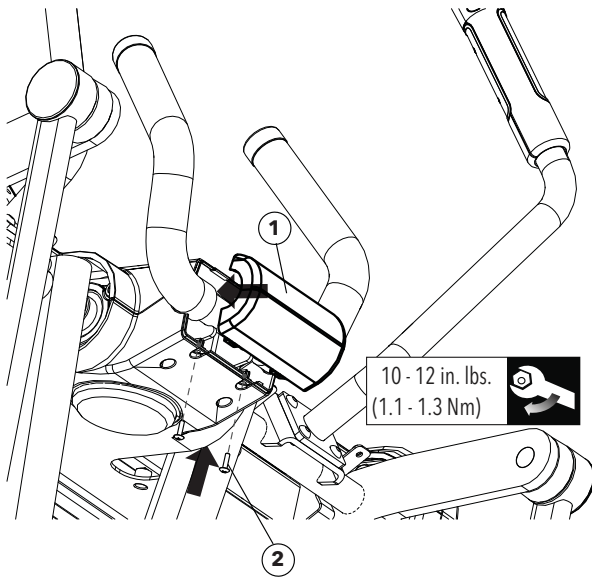


	Description	Qty.
1	Bullhorn Cover	1
2	M4 X 12MM Phillips Pan Head Screw	2
<i>Phillips Screwdriver</i>		

8. Install upper plastics to bridge assembly.

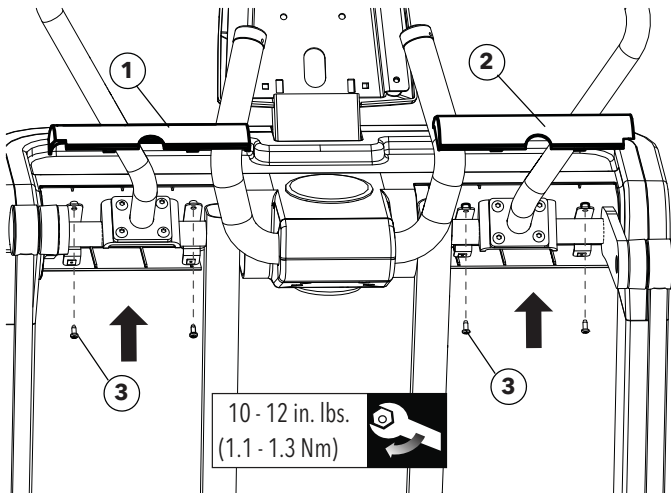


	Description	Qty.
1	Left Upper Plastic	1
2	Right Upper Plastic	1
3	M4 X 12MM Phillips Pan Head Screw	4
<i>Phillips Screwdriver</i>		

9. Install lower plastics to bridge assembly.

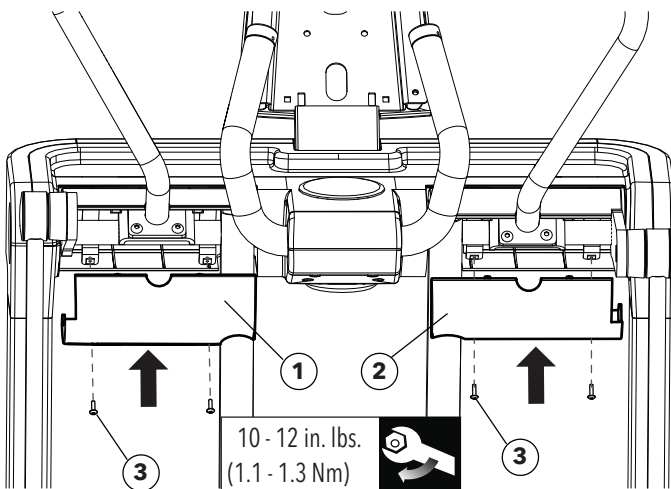


	Description	Qty.
1	Left Lower Plastic	1
2	Right Lower Plastic	1
3	M4 X 12 MM Phillips Pan Head Screw	4
<i>Phillips Screwdriver</i>		

10. Install pedal levers.

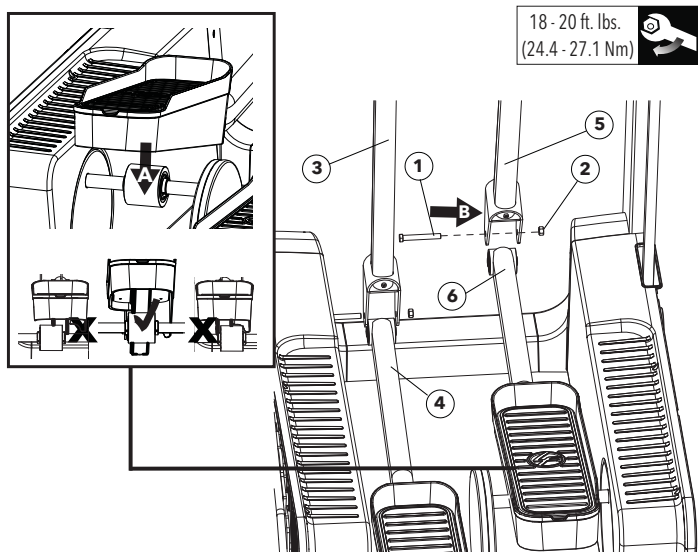


	Description	Qty.
1	M10 X 75MM Bolt	2
2	M10 Hex Nut	2
3	Left Rocker Arm	1
4	Left Pedal Lever	1
5	Right Rocker Arm	1
6	Right Pedal Lever	1
<i>17mm Socket Wrench and 17mm Open End Wrench</i>		

11. Attach pedal lever clevis covers.

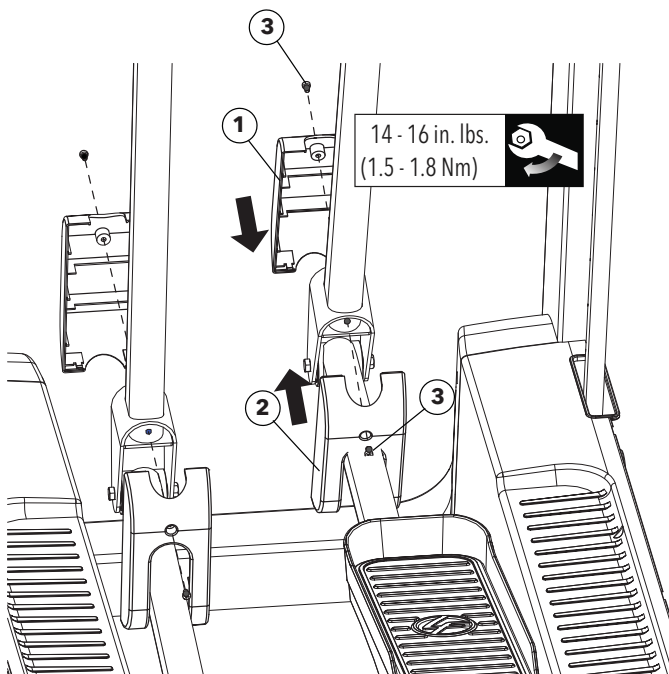


	Description	Qty.
1	Front Clevis Cover	2
2	Rear Clevis Cover	2
3	M5 X 8MM Pan Head Screw	4
<i>Phillips Screwdriver</i>		

12. Attach console.

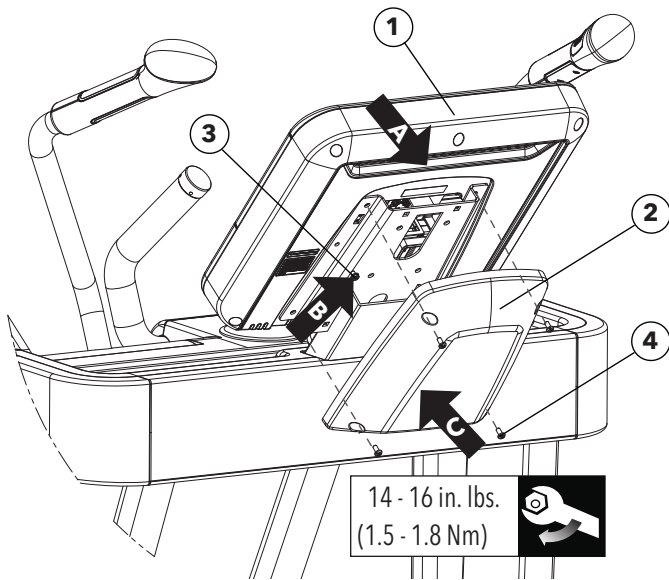


	Description	Qty.
1	Console	1
2	Console Bracket Cover	1
3	M5 X 6MM Grounding Screw	1
4	M5 X 14MM Phillips Pan Head Screw	4
<i>Phillips Screwdriver</i>		

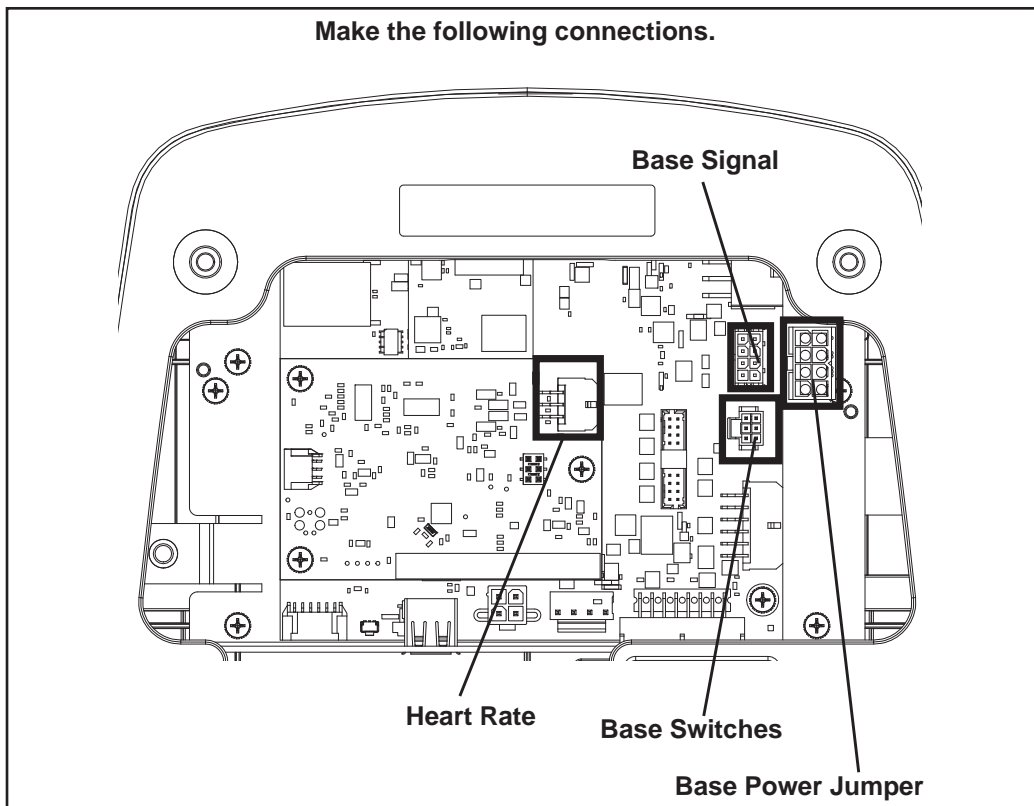

13. Attach left and right inner front shrouds.

10 - 12 in. lbs.
(1.1 - 1.3 Nm)

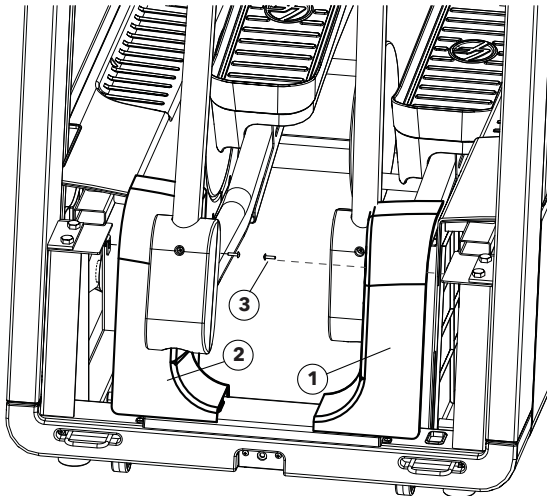


	Description	Qty.
1	Left inner shroud	1
2	Right inner shroud	1
3	M4 X 12 MM Phillips Pan Head Screw	2
<i>Phillips Screwdriver</i>		

14. Reinstall right and left side outer shrouds.

Note: Use previously saved hardware and three additional screws per shroud.

10 - 12 in. lbs.
(1.1 - 1.3 Nm)

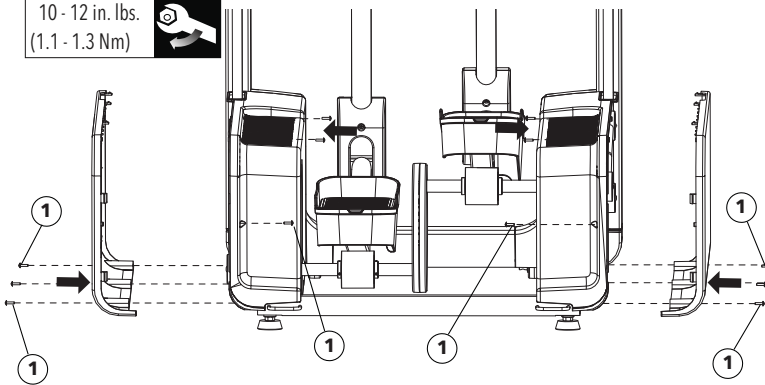

	Description	Qty.
1	M4 X 12MM Phillips Pan Head Screw	6 new screws (6 saved screws)
<i>Phillips Screwdriver</i>		

100%



MAKE SURE ALL HARDWARE IS TIGHT!

ASSUREZ-VOUS QUE TOUTE LA VISSERIE EST BIEN SERRÉE !

CONTROLEER OF ALLE BEVESTIGINGEN GOED VAST ZITTEN!

SICHERSTELLEN, DASS ALLE BEFESTIGUNGSTEILE FESTGEZOGEN SIND!

ASSICURARSI CHE TUTTA LA BULLONERIA SIA BE N STRETTA

ASEGÚRESE DE QUE TODAS LAS PIEZAS ESTÉN BIEN APRETADAS.

ASSEGURE-SE DE QUE TODAS AS PEÇAS ESTÃO APERTADAS!

TÜM DONANIMIN SIKI OLDUĞUNU KONTROL EDİN!

УБЕДИТЕСЬ, ЧТО ВСЕ РЕГУЛЯТОРЫ УРОВНЯ ОПУЩЕНЫ!

모든 하드웨어가 단단히 고정되어 있는지 확인하십시오!

确保所有硬件已紧固

すべての金具がしっかり固定されていることを確認してください!



تأكد من أن جميع المعدات مثبتة بإحكام!